


TANZINI Touch Wall Socket



Wall Socket Charger:

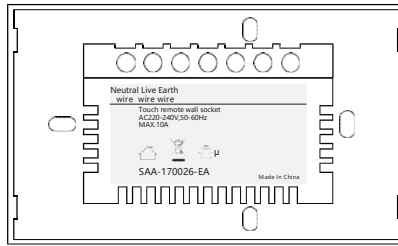

Dimension: 120*72*42MM
Voltage: 110-240V AC/50~60Hz
Operating Current: 10A



Remote Technical Parameters:


Remote range: 20M
Remote battery: 12V,23AE
Frequency: 433Mhz

Double Socket Outlet >>>


- ♦ High quality tempered glass panel design, never fade.
- ♦ With blue LED indicator, very distinguished.
- ♦ Easy to install, replace the mechanical switch directly.
- ♦ Remote control or Wi-Fi control is viable.

Dimension: 120*72*42MM
Voltage: 110-240V AC/50~60Hz
Operating Current: 10A


Remote range: 15-20M
Remote battery: 12V,23AE
Frequency: 433Mhz



TS57HW/TS87HW



TS57HB/TS87HB



TS57VW/TS87VW




TS57VB/TS87VB

Single Socket & USB Charger >>>

- ♦ High quality tempered glass panel design, never fade.
- ♦ With blue LED indicator, very distinguished.
- ♦ Easy to install, replace the old switch directly.

Dimension: 120*72*42MM
Voltage: 110-240V AC/50~60Hz
Operating Current: 10A
USB charger: DC 5V / 2.1A




TS56USHW



TS56USHB

TANZINI Touch Switch

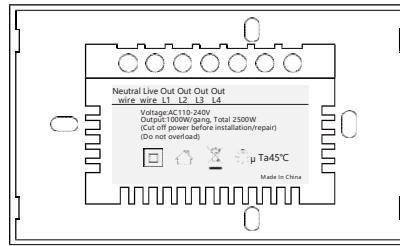

AC Specifications:

Dimension: 120*72*42MM
Operating voltage: 110V-240V/50-60HZ
Rated load: 1000W/Gang, total 2500W




Remote Specifications:


Remote battery: 20M
Remote battery: 12V, 23AE
Frequency: 433Mhz
Output Power: 50mW

Touch switch / Remote control >>>


- ♦ High quality crystal tempered glass panel design, never fade.
- ♦ With blue LED indicator, very distinguished, more humanization design: 50% brightness of backlight when switch is off, 100% brightness of backlight when switch is on
- ♦ E-start, no sparking contacts.
- ♦ Brand new imported American IC & capacitive touch sense, more superior performance & sensitive touch.
- ♦ Overload & overheat protections, make your home safer.
- ♦ Easy to install, replace the mechanical switch directly.
- ♦ Applicable to all the common lamps, such as incandescent, fluorescent lamps, led lamps, motor and so on
- ♦ Suitable for home, office, hotel, hospital and so on.




TS511W / TS811W




TS511B / TS811B




TS512W / TS812W




TS512B / TS812B



TS513W / TS813W



TS513B / TS813B



TS514W / TS814W




TS514B / TS814B

Touch Dimmer switch / Remote control >>>

- ♦ Including all functions of touch switch, you can also enjoy the dimmer functions freely.
- ♦ Touch ◀ button, the light will become brighter. Touch ▶ button, the light will become weaker.
- ♦ Used for incandescent lamps, halogen lamps ONLY.
- ♦ Note: If working for LED lamp,
1) LED lamp must be dimmable and more than 20W.

Specifications:

- ♦ Dimension: 120*72*42 MM
- ♦ Rated load: less than 600W/Gang
- ♦ Operating voltage: 110-240VAC/50Hz~60Hz.




TS5DMW / TS8DMW




TS5DMB / TS8DMB

Touch Timer switch / Remote control >>>

- ♦ Including all functions of touch switch, you can also enjoy the time delay functions freely.
- ♦ Touch '⋮' button, the light will be automatically off after 3 minutes.
- ♦ Touch '⋮⋮' button, the light will be automatically off after 9 minutes.
- ♦ No need to turn off the light in dark, enjoy the fun of Auto. light off.



TS5TMW / TS8TMW




TS5TMB / TS8TMB

Touch Fan switch / Remote control >>>

- ♦ ON/OFF button, touch once to turn on the fan, touch the same button to turn off.
- ♦ Easy to install, replace the mechanical switch directly.
- ♦ Suitable for ceiling fans.

Specifications:

- ♦ Dimension: 120*72*42 MM
- ♦ Operating voltage: 110-240VAC/50Hz~60Hz.
- ♦ Rated load: less than 600W/Gang for triac-controlled fan.
less than 100W/Gang for relay-controlled fan.



TS5FAW/TS8FAW




TS5FAB/TS8FAB

Touch Curtain switch / Remote control >>>

- ♦ Touch '⏮' button, the curtain will open; touch '⏭' button, the curtain will close; touch '⏸' button, the curtain will stop automatically.
- ♦ Easy to install, replace the mechanical switch directly.
- ♦ Only support the curtain with stop function.

Specifications:

- ♦ Dimension: 120*72*42MM
- ♦ Operating voltage: 110-240VAC/50Hz~60Hz.
- ♦ Rated load: less than 600W/Gang



TS5CUW/TS8CUW



TS5CUB/TS8CUB

Touch Doorbell switch >>>


- ♦ High quality crystal tempered glass panel design, never fade.
- ♦ With blue LED indicator, very distinguished.
- ♦ Easy to install, replace the mechanical switch directly.
- ♦ Only support the 110-230V doorbell.

Specifications:

- ♦ Dimension: 120*72*42MM
- ♦ Operating voltage: 110-240VAC/50Hz~60Hz.
- ♦ Rated load: less than 100W




TS5PRW/TS8PRW




TS5PRB/TS8PRB

Intermediate Touch switches >>>


- ♦ The same light can be controlled by two switches in two different places. Do not need to turn on/off the light in one place, very convenient.
- ♦ Note: The two switches should be installed in the same room or floor. Try to avoid installing them in the corners or between walls.
- ♦ Control Distance: less than 20m.
- ♦ Frequency: 433 MHz
- ♦ Every intermediate touch switches consist of two switches (Switch A & Switch B).
- ♦ Switch B only need power wire, and does not need strip cable.

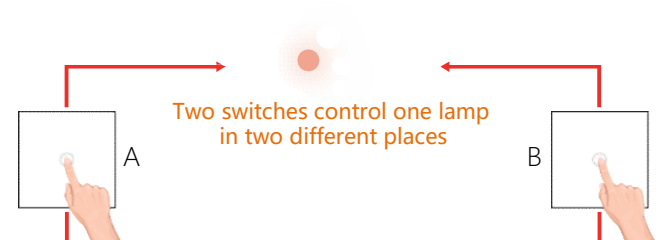


Intermediate Touch Switch




TS8S1W




TS8S2W




TS8S3W




TS8S4W




TS8S1B



TS8S2B




TS8S3B




TS8S4B


▼ **TANZINI Glass Plate**

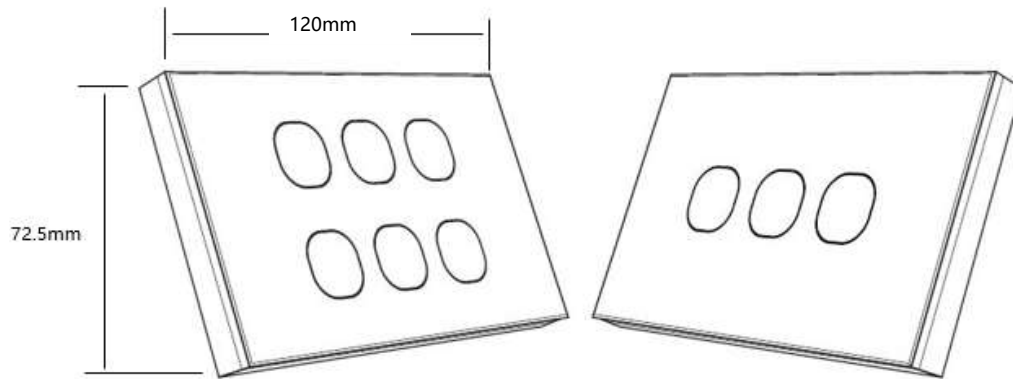


TSP1W




TSP2W




TSP3W




TSP4W




TSP6W



TSP1B



TSP2B



TSP3B



TSP4B



TSP6B

- ◆ High quality tempered glass panel design, never fade.
- ◆ Easy to fit with mechanical mechanisms.